

Evaluation Report

307



Moridge 8440 Grain Dryer

A Co-operative Program Between

MORIDGE 8440 GRAIN DRYER

MANUFACTURER:
Moridge Manufacturing Inc.
Box 810
Moundridge, Kansas 67107

DISTRIBUTORS:
Grant Services
Box 39
Foam Lake, Saskatchewan
S0A 1A0

Alteen Distributors
Box 6450
Wetaskiwin, Alberta
T9A 2G2

Voth Dryer Systems
Box 249
Manitou, Manitoba
R0G 1G0

RETAIL PRICE:
\$14,602.00 (March, 1983, f.o.b. Humboldt, complete with power take-off drive, 0.05 in (1.3 mm) rapeseed screens and optional operator's platform, foldaway loading auger, and grain cleaner attachment.)

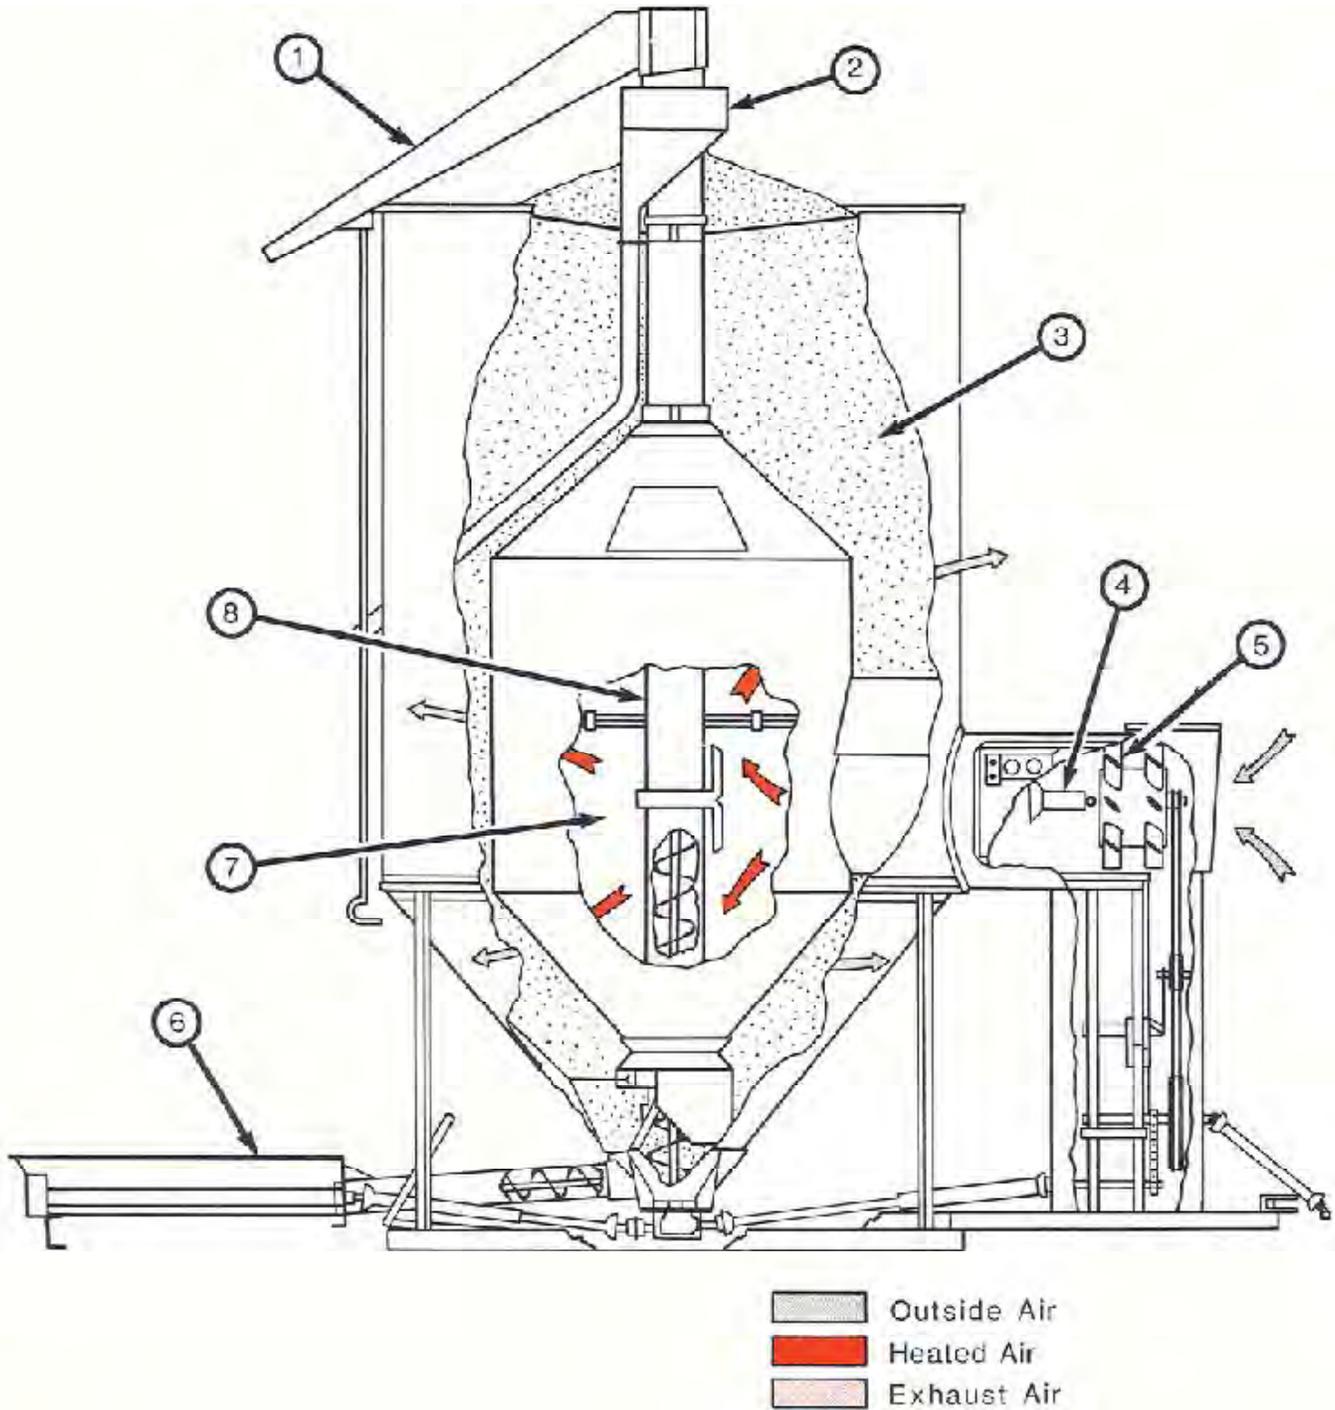


FIGURE 1. Moridge 8440 Grain Dryer: (1) Unloading Chute, (2) Grain Cleaner, (3) Grain Chamber, (4) Burner, (5) Fan, (6) Loading Auger, (7) Air Plenum, (8) Vertical Auger.

SUMMARY AND CONCLUSIONS

Functional Performance: The Morigde 8440 recirculating batch grain dryer was very good in wheat, barley, rapeseed and Hybrid 3996 corn.

Drying Capacity: The rated drying capacity of the Morigde 8440 was 127 bu/h (3.5 t/h) in wheat, 134 bu/h (2.9 t/h) in barley, 124 bu/h (2.8 t/h) in rapeseed and 87 bu/h (2.2 t/h) in corn.

Fuel Consumption: At rated drying capacity, the specific fuel consumption or the amount of propane required to dry a quantity of grain was 5.4 gal/100 bu (9.1 L/t) in wheat, 5.1 gal/100 bu (10.6 L/t) in barley, 4.2 gal/100 bu (8.4 L/t) in rapeseed and 11.4 gal/100 bu (20.4 L/t) in corn. This corresponds to a fuel consumption of 7.0 gal/h (32 L/h) in wheat, 6.6 gal/h (30 L/h) in barley, 5.3 gal/h (24 L/h) in rapeseed and 9.9 gal/h (45 L/h) in corn.

Energy Consumption: At rated capacity, the specific energy consumption or the total energy required to remove a quantity of water from the grain, was 1500 Btu/lb (3600 kJ/kg) in wheat, 1800 Btu/lb (4200 kJ/kg) in barley, 1500 Btu/lb (3600 kJ/kg) in rapeseed and 1600 Btu/lb (3700 kJ/kg) in corn.

Grain Quality: A grade loss occurred in commercial red spring wheat when operating at the manufacturer's recommended temperature settings. At temperature settings, that did not reduce the grade of commercial red spring wheat, the rated drying capacity decreased 30 to 40% while specific fuel and energy consumption increased by 10 to 20%.

Ease of Operation and Adjustment: The Morigde 8440 was easy to transport and set up. Burner performance was very good and provided a steady and uniform drying air temperature in most conditions. Adequate drying air temperatures could not be obtained when drying corn at outside temperatures below 20°F (-7°C). The drying air temperature was easy to set. Grain cooling was very good. Ease of filling and unloading was good. Grain recirculation was adequate for most conditions. Ease of cleaning the Morigde 8440 was fair. Lubrication points were accessible and fairly easy to service.

Safety: The Morigde 8440 was safe to operate as long as the manufacturer's safety instructions were followed. The sound level at the operator's station was 102 dBA. It is recommended that an operator wear ear protection when working near the Morigde 8440.

Operator Manual: The operator manual was well illustrated, clearly written and contained much useful information.

Mechanical History: Seven minor mechanical problems occurred during the tests.

RECOMMENDATIONS

It is recommended that the manufacturer consider:

1. Supplying a hitch jack.
2. Lengthening the control circuit power supply cord.
3. Supplying holding brackets to prevent the unloading chute from turning in the wind.
4. Modifications to prevent plugging of the unloading chute in wet conditions.
5. Reducing the recommended temperature settings to prevent grade loss when drying commercial red spring wheat.
6. Providing a warning of caution when using the ladder during drying.
7. Modifications to keep the airflow sensor from freezing shut and preventing burner start-up in cold weather.
8. Providing a warning system on the dryer to indicate a safety shutdown.
9. Including information on transporting in the operator manual.

Senior Engineer -- G.E. Frehlich

Project Technologist -- R.M. Bartel

THE MANUFACTURER STATES THAT

With regard to recommendation number:

1. Customer demand for an optional hitch jack has not been sufficient to justify the added cost to the dryer.
2. On 1983 machines, the control circuit power cable has been

lengthened to accommodate tractors with batteries set further forward.

3. Stops for the unloading spout are currently on 1983 machines.
4. An optional kit is available for grain conditions, which require a steeper slope of the unloading chute to prevent bridging.
5. We will make a new listing in our recommended air and grain drying temperature chart to include commercial spring wheat.
6. A warning decal cautioning the operator about using the ladder during drying is being considered.
7. Due to CSA requirements, it is almost impossible to modify the air differential flow switch. Nuisance safety shutdowns caused by frosting of the air switch during cooling of grain in abnormally cold weather have not been reported from the field.
8. An optional warning system to indicate safety shutdown is being considered.
9. Instructions on transportation information will be reviewed.

MANUFACTURER'S ADDITIONAL COMMENTS

1. The recommended drying temperatures included in the manual for wheat will not cause grade damage to hard red winter wheat or most straight-cut spring wheat. Spring wheat windrowed and damaged by rainy weather is very difficult to dry without causing additional grade loss.
2. The model 8440 has been designed to operate at a power take-off speed of 400 to 420 rpm to allow the tractor engine to operate at its maximum fuel efficiency. When using a 1000 rpm power take-off, the operator must check with a tachometer to ensure that he does not over speed the fan.
3. Current model 8440 dryers have increased loading capacity over the 8440 tested.

GENERAL DESCRIPTION

The Morigde 8440 is a recirculating batch, cross-flow grain dryer with an axial fan, propane burner and cylindrical grain chamber enclosing the air plenum. Grain is loaded into a loading auger at ground level or into the top of the dryer. The grain is fed into the bottom of a vertical auger by the grain regulator and continuously recirculated from the bottom to the top of the dryer. An optional grain cleaner attachment removes fines and small weed seeds as the grain is recirculated. Outside air is forced by the fan past the burner into the air plenum and through the grain chamber, to dry or cool the grain. Dry grain is discharged at the top of the dryer.

Drying air temperature is controlled by a pressure regulator while drying grain temperature is controlled by a modulating valve. Both temperatures are monitored at the control panel. The length of the drying cycle is set on a timer, which automatically shuts off the burner to start the cooling cycle.

The test machine was power take-off driven. The control circuit required a 12 V DC supply. An optional three speed electric drive and 110 V AC control circuit were available.

A safety control circuit shuts off fuel to the burner if the burner flame is extinguished, the fan shuts down, or if the drying air temperature exceeds the high limit setting.

Detailed specifications are given in APPENDIX I.

SCOPE OF TEST

The Morigde 8440 was operated with artificially and naturally wet grain under the conditions shown in TABLE 1 for 133 hours while drying about 12,100 bu (295 t) of grain. It was evaluated¹ for ease of operation and adjustment, rate of work, power requirements, fuel and energy consumption, quality of work, operator safety and suitability of the operator manual.

TABLE 1. Operating Conditions

Grain	Grade	Dockage	Moisture Content	Hours	Grain Dried	
		%	%		bu	t
Wheat	2CW RS	3	17.0 to 24.5	37	3300	90
Barley	1 Feed	1	17.0 to 23.6	33	2850	62
Rapeseed	1CW	7	11.6 to 16.7	24	2900	65
Corn (Hybrid 3996)	4CW	2	17.7 to 26.6	39	3050	78
Total				133	12100	295

¹Tests were conducted as outlined in the Machinery Institute Detailed Test Procedures for Grain Dryers.

RESULTS AND DISCUSSION

EASE OF OPERATION AND ADJUSTMENT

Assembly: The Morigde 8440 required some assembly. The top screen and vertical auger section were installed by three men in about 3-1/2 hours. The grain cleaner attachment was installed by one man in about 1-1/2 hours. Assembly instructions were unclear and made installation difficult.

Transporting: The Morigde 8440 was quite stable when hitching, allowing easy one man hook-up. No hitch jack was provided and it is recommended that the manufacturer supply one. The hitch clevis was not adjustable to suit varying tow bar heights.

Transport width of the test machine was 9 ft (2.8 m) while transport height was 18.8 ft (5.7 m). Extreme care was needed when transporting on public roads, through gates, over bridges, and beneath power and telephone lines. The transport height could be decreased to 12.6 ft (3.8 m), by removing the top screen section, vertical auger section and grain cleaner attachment.

The Morigde 8440 towed well at normal transport speeds. Care had to be taken to use a towing vehicle with adequate brakes and weight to permit safe stopping in emergency situations, and to reduce front-to-rear rocking while transporting. Caution had to be used when travelling over uneven terrain because of minimal ground clearance (FIGURE 2).

Rear visibility when transporting was good. The rear lights of the towing truck were partially obscured by the dryer. Adequate signal devices were required for travelling on public roads.



FIGURE 2. Minimal Ground Clearance on Uneven Terrain.

Setup: The Morigde 8440 was set up by one man in about 1/2 hour. The base required blocking on uneven surfaces. The dryer was unstable when jacking into transport or field position unless properly anchored.

The power take-off drive was easily attached to the tractor. The propane supply was easily connected to the dryer plumbing. The power supply cord for the control circuit required lengthening to reach the tractor. It is recommended that the manufacturer consider lengthening the power supply cord.

The Morigde 8440 did not require additional grain conveyors to load from or into trucks.

Fan: The power take-off driven fan (FIGURE 3) was operated at 2400 rpm for drying and 2850 rpm for cooling. The fan was easily disengaged by a clutch (FIGURE 4). The clutch was very convenient as it allowed quieter and cleaner loading and unloading operations.

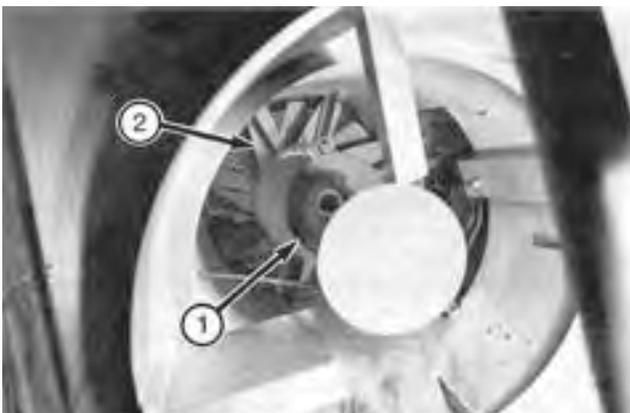


FIGURE 3. Fan Housing: (1) Burner, (2) Fan.



FIGURE 4. Controls: (1) Fan Clutch Lever, (2) Loading Auger Clutch Lever.

Power take-off speed was increased from 420 rpm when drying to 500 rpm when cooling. A tractor with a 1000 rpm power take-off is recommended to permit operating the tractor at a low engine speed. It is important that the operator does not exceed permissible power take-off speeds.

Burner: The spark-ignited burner (FIGURE 3) was started with a switch at the control panel (FIGURE 5). Fuel pressure was monitored on gauges in the control panel. The burner would not ignite, on low flame setting with the burner gauge pressure below 2 psi (14 kPa). However, the burner would operate at lower fuel pressures once the flame was ignited. The burner performed well for all other conditions encountered.

The optional operator's platform was required to obtain easy access to the control panel.

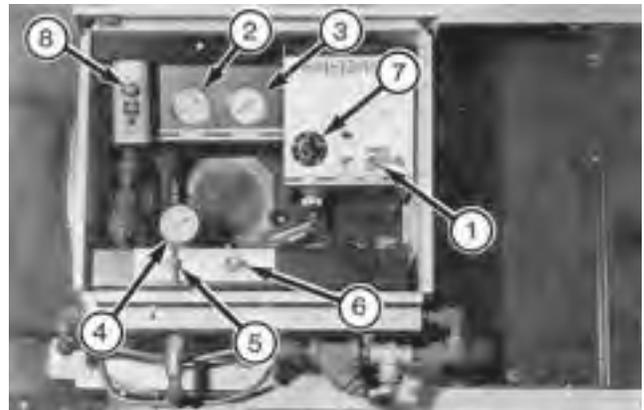


FIGURE 5. Controls and Instruments: (1) Power Switch, (2) Drying Air Temperature Gauge, (3) Grain Temperature Gauge, (4) Fuel Pressure Gauge, (5) Pressure Regulator Valve, (6) Grain Dryers. Modulating Valve, (7) Timer, (8) High Limit Switch.

Grain Filling: The Morigde 8440 could be filled using the optional foldaway loading auger (FIGURE 6) or a portable auger with a discharge height of 16 ft (4.9 m). The loading auger was heavy, making it difficult for one man to lower it to the ground. The loading auger extended 7.2 ft (2.2 m) from the dryer providing fairly easy access when filling from a truck. Supervision was required during filling. The loading auger was easily engaged or disengaged.

The holding capacity of the Morigde 8440 was about 392 bu (14.3 m³). Batches smaller than the holding capacity could be dried, but at least 200 bu (7.3 m³) of grain was required.



FIGURE 6. Grain Filling.

Grain Drying: The drying air temperature was set by adjusting a screw on the pressure regulator. The grain temperature was set by adjusting a screw on the modulating valve. The maximum drying air temperature limit was adjusted on a high limit temperature switch in the control panel. If this setting was exceeded, the fuel to the burner was automatically shut off. The length of the drying cycle was set on a timer in the control panel.

The drying air temperature was controlled by the pressure regulator until the set grain temperature was achieved. The modulating valve then regulated the drying air temperature to maintain the grain temperature. Drying air temperature was monitored at the control panel and was adequate except when drying corn at temperatures below 20°F (-7°C).

The dryer was equipped with a timer that would automatically control the length of the drying cycle. The length of the drying cycle was initially determined by monitoring grain moisture content. Grain samples were obtained from the sampling tube at ground level or from the vertical auger discharge as recommended by the manufacturer. The grain samples from the vertical auger discharge were very representative if the sampling time was more than 15 minutes. Once set, the timer automatically shut off the burner. Drying time had to be adjusted when grain or outside air conditions changed.

The Morigde 8440 required minimal supervision while drying. However, if the dryer was to be operated at the optimum drying air temperature for maximum capacity, the pressure regulator had to be frequently adjusted for changing conditions.

Grain flow through the dryer was adequate and uniform except when drying high moisture trashy corn. Bridging occurred once over the opening to the bottom of the vertical auger. Uniform grain flow was restored by cooling the grain for a short time.

Grain Cooling: Grain cooling occurred after the timer automatically shut off the burner. For faster cooling, the power take-off speed was increased from 420 to 500 rpm. Grain temperature was monitored on a gauge in the control panel.

Grain Discharge: Grain was discharged at the top of the dryer. A chute was manually swung around to direct the grain from the vertical auger to a truck on either side of the dryer (FIGURE 7).



FIGURE 7. Grain Discharge.

On windy days, the chute was occasionally blown from the recirculating position into a partial unloading position, spilling grain onto the ground. It is recommended that the manufacturer consider supplying holding brackets for the chute.

When the unloading chute became wet or when emptying wet grain, the unloading chute plugged, causing grain to spill over the sides. It is recommended that the manufacturer consider modifications to prevent plugging of the unloading chute in wet conditions.

Grain Cleaner: The Morigde 8440 was equipped with an optional grain cleaner attachment (FIGURE 8). Fines and small weed seeds were separated and discharged from the dryer as the grain flowed from the vertical auger outlet across two screens. The screens had to be periodically cleaned with a wire brush. One man could clean or change the screens in about 5 minutes. Screens were available for wheat and corn.

The grain cleaner removed about 20 to 40% of the total dockage in wheat and about 60 to 80% in corn. The grain cleaner attachment was useful since it reduced dockage and allowed more efficient grain drying.



FIGURE 8. Grain Cleaner Attachment.

Cleaning: Ease of cleaning the Morigde 8440 was fair. The screens, especially those in the lower grain chamber, partially plugged during operation. The screens could be adequately cleaned with a high pressure washer.

Fines did not collect in the air plenum since the bottom of the plenum had an opening. A small cleanout door (FIGURE 9) was provided for the vertical auger sump. Cleaning the vertical auger sump was difficult. Fines accumulated under the dryer and had to be cleaned up daily to prevent buildup and excessive driveline wear (FIGURE 10).



FIGURE 9. Servicing: (1) Cleanout Door, (2) Limited Access for Servicing Gear Boxes.



FIGURE 10. Fines Accumulated Under the Dryer.

Servicing: The Moridge 8440 had 13 pressure grease fittings. One required greasing every 6 hours, two required greasing every 8 hours and ten required greasing every 40 hours. The oil level in the grain regulator gearbox and the auger drive gearbox had to be checked every 8 hours. The oil in the auger drive gearbox had to be changed each season. Checking and changing the oil was difficult (FIGURE 9).

RATE OF WORK

Standard Conditions: To provide a meaningful comparison of grain dryer performance, the capacity, and fuel and energy consumption of the dryers should be determined for identical drying conditions. Because it is impossible to obtain the same air and grain conditions in the field when testing each machine, the dryer capacities and fuel and energy consumptions included in this report have been mathematically adjusted to standard drying conditions². These adjusted results can be compared to the adjusted results of other dryers, even though they were tested under different conditions or in different years.

Drying Capacity: The drying capacity³ of a dryer is the rate at which grain can be dried to the dry moisture content specified by the Canadian Grain Commission, while operating the dryer at standard conditions and the settings recommended by the manufacturer. The drying capacity is based on the time to fill, dry, cool and discharge the grain. Drying capacity varies with the grain type and the amount of moisture removed. FIGURES 11 to 14 present capacity curves for the Moridge 8440 while drying wheat, barley, rapeseed and Hybrid 3996 corn.

Grade loss occurred when drying red spring wheat at the manufacturer's recommended temperatures. The drying capacities shown for wheat would be 30 to 40% less if the dryer was operated at lower temperatures to prevent grade loss.

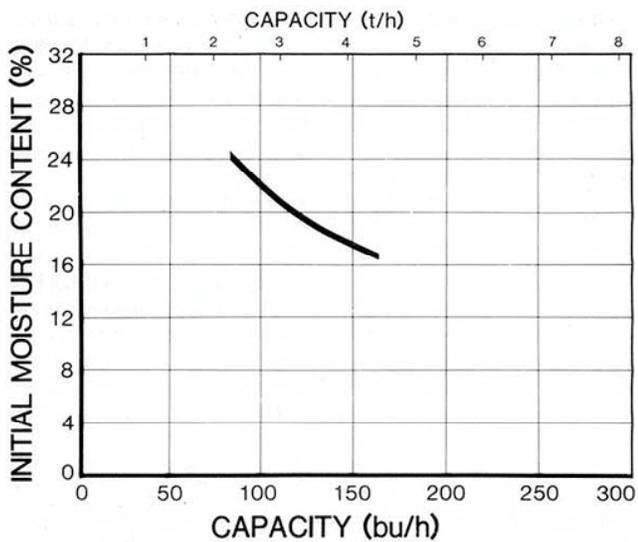


FIGURE 11. Drying Capacity in Wheat.

Rated Drying Capacity: The Machinery Institute has designated the rated drying capacity as the capacity of the dryer while removing 5% moisture in wheat, barley and rapeseed, and 10% moisture in corn. It is based on the time required to fill, dry, cool and discharge the grain under these conditions. The total batch time (TABLE 2) for the Moridge 8440 varied from 2.6 hours in wheat and barley to 3.4 hours in corn, while the rated drying capacity (TABLE 3) varied from 87 bu/h (2.2 t/h) in corn to 134 bu/h (2.9 t/h) in barley. Operating the dryer at lower temperatures to prevent grade loss in commercial red spring wheat decreased the rated capacity by 30 to 40%.

²The standard drying conditions used by the Machinery Institute for the presentation of grain dryer results are given in APPENDIX II.

³The Machinery Institute determines the drying capacity using the weight of the dried grain discharged from the dryer. Some manufacturers state their drying capacity using the weight of the wet grain entering the dryer. See APPENDIX VI for the wet grain to dry grain conversion.

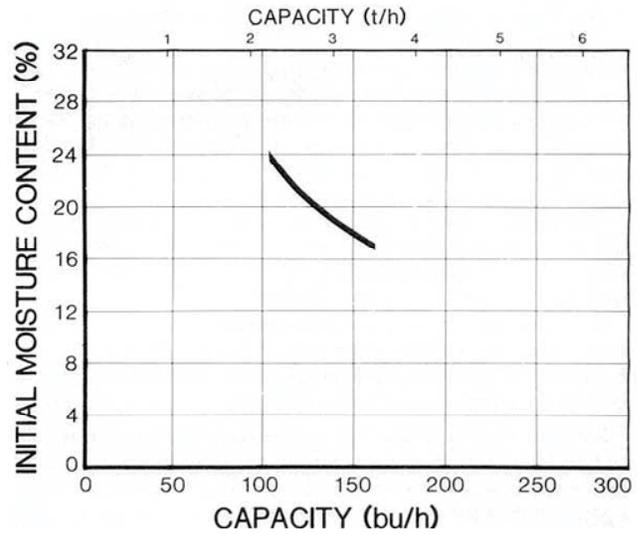


FIGURE 12. Drying Capacity in Barley.

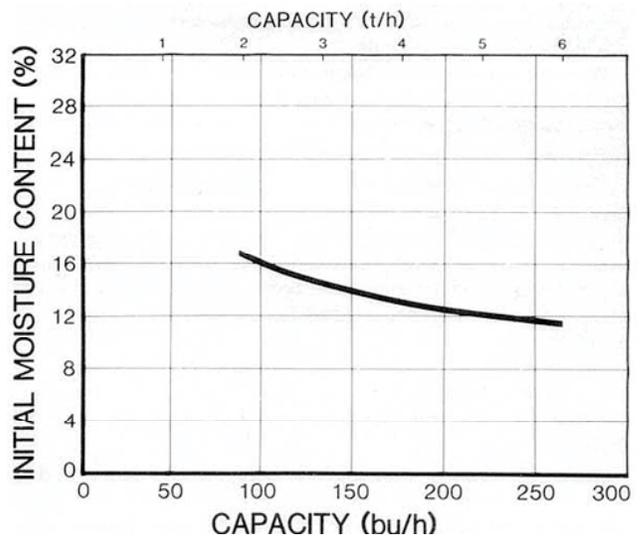


FIGURE 13. Drying Capacity in Rapeseed.

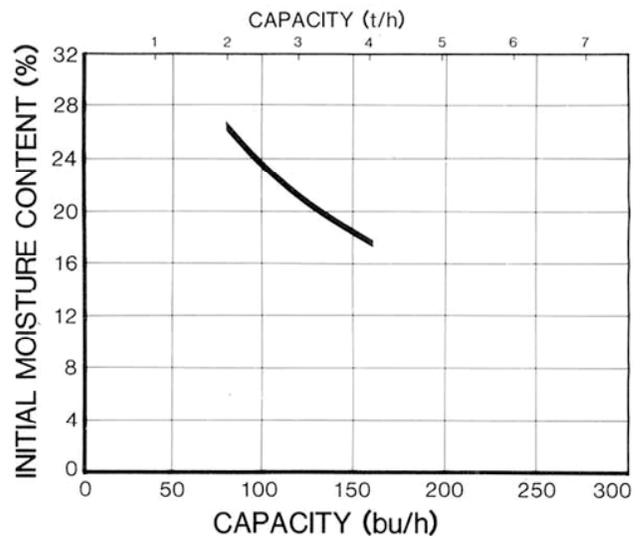


FIGURE 14. Drying Capacity in Corn (Hybrid 3996).

QUALITY OF WORK

Grain Quality: Grain can be damaged in the dryer, if it is dried too long at excessively high temperatures. The grain damage that can occur before there is a loss in the grade and a corresponding reduction in the grain price depends on whether the grain is seed, commercial or feed. Feed grain is permitted the greatest damage and seed grain the least damage before a grade loss occurs. It is

very important for the operator to occasionally have the grain tested for damage especially when drying unfamiliar grains or operating at new dryer settings.

TABLE 2. Batch Times

Grain	Filling	Drying	Cooling	Discharge	Total
	Hours	Hours	Hours	Hours	Hours
Wheat ⁴	0.3	1.3	0.8	0.2	2.6
Barley	0.3	1.1	1.0	0.2	2.6
Rapeseed	0.2	2.1	0.3	0.2	2.8
Corn (Hybrid 3996)	0.3	2.1	0.8	0.2	3.4

TABLE 3. Rated Drying Capacities

Grain	Initial Moisture Content	Moisture Removed	Drying Air Temperature Setting		Drying Grain Temperature Setting		Rated Drying Capacity		Fig. No.
	%	%	°F	°C	°F	°C	bu/h	t/h	
	Wheat	19.5	5	290	143	130	54	127	
Barley	19.8	5	290	143	130	54	134	2.9	12
Rapeseed	15.0	5	180	82	110	43	124	2.8	13
Corn (Hybrid 3996)	25.5	10	300	150	140	60	87	2.2	14

No grade loss⁴ occurred when drying commercial rapeseed or feed barley and corn. A grade loss did occur when drying commercial red spring wheat at the recommended drying temperature settings. However, reducing the drying air temperature to 180°F (82°C) and the drying grain temperature to 110°F (43°C) prevented grade loss when drying commercial wheat. It is recommended that the manufacturer consider reducing the recommended temperature settings for drying commercial red spring wheat.

Drying Air Temperature: A uniform drying air temperature minimizes grain damage and provides uniform and efficient grain drying. The uniformity of the drying air temperature for the Morigde 8440 was fair. The drying air temperature gauge accurately indicated the average drying air temperature. See APPENDIX IV for further details.

POWER REQUIREMENTS

A 12 V DC electrical supply was required to operate the control circuit. Power take-off power requirements varied from 13 hp (9.8 kW) in rapeseed to 16 hp (11.9 kW) in wheat. An optional electric drive and a 110 V AC control panel were available. A 20 hp (15 kW) tractor should have sufficient power to operate the Morigde 8440.

FUEL AND ENERGY CONSUMPTION

Specific Fuel Consumption: Fuel consumption of a grain dryer varies considerably with the temperature and moisture content of the grain and ambient air, the drying air temperature, airflow and burner efficiency. To permit comparison of fuel used in different dryers, fuel consumption must be adjusted to standard conditions and must be related to the quantity of grain dried. Specific fuel consumption is a measure of the fuel used to dry a quantity of grain. It is expressed in gallons (gal) of propane per 100 bushels (bu) of grain dried (litres (L) of propane per tonne (t) of grain dried). A low specific fuel consumption indicates efficient fuel use.

The specific fuel consumption for the Morigde 8440 at rated drying capacity (TABLE 4) varied from 4.2 gal/100 bu (8.4 L/t) in rapeseed to 11.4 gal/100 bu (20.4 L/t) in corn. Operating the dryer at lower temperatures to prevent grade loss in commercial red spring wheat, increased specific fuel consumption by 10 to 20%. Fuel consumption⁵ ranged from 5.3 gal/h (24 L/h) in rapeseed to 9.9 gal/h (45 L/h) in corn.

Specific Energy Consumption: Energy consumption of a dryer also varies with drying conditions and grain dryer design. To permit comparison of the energy used in different dryers, energy consumption must be adjusted to standard conditions and related to the quantity of water removed from the grain. Specific energy consumption is a measure of overall dryer efficiency. It is the total energy, including electrical, mechanical and fuel, required to remove a quantity of water. It is expressed in British thermal units (Btu) of energy per pound (lb) of water removed (kilojoules (kJ) of energy per

kilogram (kg) of water removed). A low specific energy consumption indicates efficient grain drying.

The specific energy consumption for the Morigde 8440 (TABLE 4) at rated drying capacity varied from 1500 Btu/lb (3600 kJ/kg) in wheat and rapeseed to 1800 Btu/lb (4200 kJ/kg) in barley. Operating the dryer at lower temperatures to prevent grade loss in commercial red spring wheat, increased specific energy consumption by 10 to 20%.

TABLE 4. Fuel and Energy Consumption

Crop	Moisture Removed	Fuel Consumption		Specific Fuel Consumption		Specific Energy Consumption	
	%	gal/h	L/h	gal/100 bu	L/t	Btu/lb	kJ/kg
Wheat ⁴	5	7.0	32	5.4	9.1	1500	3600
Barley	5	6.6	30	5.1	10.6	1800	4200
Rapeseed	5	5.3	24	4.2	8.4	1500	3600
Corn (Hybrid 3996)	10	9.9	45	11.4	20.4	1600	3700

OPERATOR SAFETY

The Morigde 8440 operator manual emphasized safety, and warning decals adequately indicated most dangerous areas. Caution was required when using the ladder, which became slippery during drying. No warning was provided and it is recommended that a warning be provided. Drives were well shielded and machine adjustments could be safely made.

Extreme care was needed when transporting on public roads, through gates, over bridges, and beneath power and telephone lines. Transport height of the 9 ft (2.8 m) wide test machine was 18.8 ft (5.7 m) when fully assembled, which is high enough to contact many prairie power and telephone lines. Operators must contact the authorities when transporting machines that exceed allowable transport widths or heights.

The Morigde 8440 towed well at normal transport speeds. Care had to be taken to use a towing vehicle with adequate brakes and weight to permit safe stopping in emergency situations and to reduce front-to-rear rocking while transporting. A hitch safety chain for transporting was not provided.

Since the rear lights of a towing truck are partially obscured by the dryer, the operator should ensure that adequate signal devices are installed before transporting on public roads. A slow moving vehicle sign was not provided since the tires are rated for normal road speeds.

Sound level at the operator's station was about 102 dBA when the Morigde 8440 was powered with a 60 hp (45 kW) tractor. It is recommended that an operator wear ear protection when working near the Morigde 8440.

The Morigde 8440 is CSA (Canadian Standards Association) certified as meeting the requirements of Gas Fired Equipment for Drying Farm Crops. The safety controls were effective in automatically shutting off the fuel to the burner if the burner flame went out, if the drying air temperature exceeded the set maximum, or if the fan shut down. While drying corn at temperatures below 5°F (-15°C), the airflow sensor occasionally froze shut during the cooling cycle and had to be defrosted before the burner could be started for the next batch. It is recommended that the manufacturer consider modifications to the airflow sensor for operating under these conditions. There was no warning system to indicate a safety shutdown and it is recommended that the manufacturer consider providing one.

A ULC approved multi-purpose fire extinguisher with a 2A 10BC rating should be kept with the dryer at all times.

OPERATOR MANUAL

The operator manual was clearly written and well illustrated. It contained useful information on safe operation, adjustments, service and lubrication. However, it did not include complete lubrication and assembly instructions. Also, information on transporting was not included and it is recommended that it be included.

DURABILITY RESULTS

TABLE 5 outlines the mechanical history of the Morigde 8440 during 133 hours of operation while drying 12,100 bu (295 t) of grain. The intent of the test was to evaluate the functional performance of the machine. An extended durability test was not conducted.

⁴Grade loss occurred when drying commercial red spring wheat at the recommended setting.

⁵Fuel consumption for batch dryers is the fuel consumed during the drying cycle averaged over the total batch time.

TABLE 5. Mechanical History

<u>Item</u>	<u>Operating Hours</u>	<u>Equivalent Grain bu</u>	<u>Dried (t)</u>
-A weld on the lower screen support arm broke and was repaired at		Beginning of test	
-The bottom of the outside screen buckled at	6	700	(16)
-A grain leak, between the grain cleaner discharge pipe and the outer screen, was sealed at	43	3900	(90)
-Rapeseed leaked from the vertical auger sump cleanout door. It was sealed at	72	6200	(154)
-The shearbolt in the auger drive broke and was replaced at	85, 90	8000, 8700	(193, 209)
-The upper screen support arm pulled through the screen.			
The screen was repaired at	94	9000	(217)
-The airflow sensor plugged at	125	11,700	(284)

DISCUSSION OF MECHANICAL PROBLEMS

Screen Buckling: The bottom of the outside dryer screen buckled slightly in several places. The cause of the buckling was not determined and no problems occurred because of it.

Shearbolt Failure: The shearbolt broke when quickly engaging the power take-off with the dryer loaded. The shearbolt was easily replaced.

**APPENDIX I
SPECIFICATIONS**

MAKE:	Moridge
MODEL (1981):	8440
SERIAL NUMBER:	0261
MANUFACTURER:	Moridge Manufacturing Inc. Moundridge, Kansas U.S.A.
GRAIN FILLING:	
-- position	ground level loading auger or top loading
-- height	
-loading auger	16 in (410 mm)
-top loading	15.3 ft (4.7 m)
-- loading hopper	
-length	6.5 ft (2.0 m)
-width	22 in (578 mm)
-reach from dryer body	7.2 ft (2.2 m)
-- loading auger	
-diameter	6 in (150 mm)
-speed	560 rpm
-drive	chain
-control	spiral jaw clutch
GRAIN CHAMBER:	
-- type	cylindrical and cone-shaped grain column
-- diameter	
-outer	8 ft (2.4 m)
-inner	5 ft (1.5 m)
-height	15.4 ft (4.7 m)
-- grain column thickness	18 in (452 mm)
-- grain recirculation	
-type	vertical auger
-diameter	10 in (254 mm)
-length	17.8 ft (5.4 m)
-speed	290 rpm
-drive	gear box
-- grain regulator	
-type	one stirring arm with vertical auger feed control
-speed	1.8 rpm
-drive	chain
-- grain cleaner attachment	
-separation device	wheat or corn screens
-location	vertical auger discharge
-number of screens	2
-screen area	116 in ² (746 cm ²) each
GRAIN DISCHARGE:	
-- type	inclined chute
-- height	15 ft (4.6 m)
-- positions	either side of machine
AIR PLENUM:	
-- shape	cylindrical with cone-shaped bottom screen
-- air transfer to grain	
-- screen porosity	
-plenum	48 holes/in ² (7.5 holes/cm ²)
-outer	148 holes/in ² (23 holes/cm ²)
-- screen hole size	
-plenum	0.09 in (2.36 mm)
-outer	0.05 in (1.30 mm)
-- screen area	
-plenum	100 ft ² (9.3 m ²)
-outer	322 ft ² (29.9 m ²)

FAN:

-- type	dual axial
-- diameter	22 in (555 mm)
-- number of blades	8
-- speed	2400 to 2850 rpm
-- drive	belt from PTO
-- control	belt tightener clutch

BURNER:

-- maximum rating	2.0 MBtu/h (2.1 GJ/h)
-- type	gun
-- fuel	propane
-- ignition	spark
-- temperature adjustment	fuel pressure regulator and grain temperature modulating valve

ELECTRICAL SYSTEM:

-- control circuit	10 amp, 12 V DC
--------------------	-----------------

NO. OF CHAIN DRIVES:

3

NO. OF BELT DRIVES:

1

NO. OF PRELUBRICATED BEARINGS:

9

LUBRICATION POINTS:

-- 6h	1
-- 8h	4
-- 40h	10
-- seasonal	1

TIRES:

2, 7.75 x 15ST, 4-ply

OVERALL DIMENSIONS:

	<u>Field Position</u>	<u>Transport Position</u>
-- wheel tread		6.8 ft (2.1 m)
-- height	18.3 ft (5.6 m)	18.8 ft (5.7 m)
-- length	19.9 ft (6.1 m)	14.1 ft (4.3 m)
-- width		
- (with grain cleaner)	10.8 ft (3.3 m)	9.1 ft (2.8 m)
- (without grain cleaner)	10.1 ft (3.1 m)	8.3 ft (2.5 m)
-- ground clearance	0 in (0 mm)	5 in (127 mm)
-- hitch height		15 in (387 mm)
-- clevis gap		1.9 in (47 mm)
-- body metal thickness	19 gauge (1.14 mm)	

WEIGHT: (Dryer Empty)

-- hitch	545 lb (247 kg)
-- transport wheels	2730 lb (1239 kg)
Total	3275 lb (1486 kg)

SOUND LEVEL: (At Operator's Station)

102 dBA

HOLDING CAPACITY:

392 bu (14.3 m³)

INSTRUMENTS:

fuel pressure gauges, drying air temperature gauge, grain temperature gauge

OPTIONS:

12 V DC or 110 V AC control panel kits, electric motor drive

liquid propane or natural gas fuel systems

grain cleaner attachment, 0.05 or 0.09 in (1.30 or 2.36 mm) dryer screens, sunflower kit, foldaway loading auger, three speed auger drive, operator's platform, power takeoff drive, automatic moisture controller

APPENDIX II

MACHINERY INSTITUTE STANDARD DRYING CONDITIONS

The Machinery Institute has chosen to state the performance of grain dryers at the following air and grain conditions:

Ambient temperature	50°F (10°C)	
Initial grain temperature	50°F (10°C)	
Barometric pressure	13.8 psia (95 kPa)	
Final grain moisture content	-wheat	14.5%
(Canadian Grain Commission)	-barley	14.8%
	-rapeseed	10.0%
	-corn	15.5%

APPENDIX III

REGRESSION EQUATIONS FOR DRYING CAPACITY RESULTS

Regression equations for the drying capacity results shown in FIGURES 11 to 14 are presented in TABLE 6. In the regressions, B = drying capacity in bu/h, C = drying capacity in t/h and M = initial grain moisture content in percent of total weight, while \ln is the natural logarithm. Sample size refers to the number of tests conducted. Limits of the regression may be obtained from FIGURES 11 to 14 while the grain conditions are presented in TABLE 1.

TABLE 6. Regression Equations

Grain	Fig. No.	Regression Equation	Simple Correlation Coefficient	Variance Ratio	Sample Size
Wheat	11	$\ln B = 10.10 - .77 \ln M$ $\ln C = 6.50 - 1.77 \ln M$	0.99	200 ¹	8
Barley	12	$\ln B = 10.10 - .77 \ln M$ $\ln C = 6.50 - 1.77 \ln M$	0.99	397 ¹	6
Rapeseed	13	$\ln B = 12.29 - .76 \ln M$ $\ln C = 8.50 - 2.76 \ln M$	0.99	211 ¹	8
Corn (Hybrid 3996)	14	$\ln B = 6.46 - 0.08M$ $\ln C = 2.78 - 0.08M$	0.97	88 ¹	8

¹Significant at $P \leq .01$

APPENDIX IV

DRYING AIR TEMPERATURE VARIATION

The coefficient of variation⁶ (CV) is used to describe the variation in the temperature within the air plenum during drying. The lower the CV, the more uniform is the drying air temperature.

TABLE 7 presents the coefficients of variation for the Moridge 8440 when drying wheat, barley, rapeseed and corn.

TABLE 7. Drying Air Temperatures

Grain	Gauge Setting		Average Drying Air Temperature		CV
	°F	°C	°F	°C	%
Wheat	290	143	284	140	11
Barley	290	143	284	140	12
Rapeseed	180	82	180	82	13
Corn	300	150	288	142	14

⁶The coefficient of variation is the standard deviation of the measured drying air temperatures expressed as a percent of the average drying air temperature.

**APPENDIX V
MACHINE RATINGS**

The following rating scale is used in Machinery Institute Evaluation Reports:

excellent	fair
very good	poor
good	unsatisfactory

**APPENDIX VI
CONVERSION TABLE**

1 inch (in)	= 25.4 millimetres (mm)
1 pound (lb)	= 0.45 kilograms (kg)
1 gallon (gal)	= 4.5 litres (L)
100 bushels (bu)	= 3.6 cubic metres (m ³)
1 British thermal unit/pound (Btu/lb)	= 2.3 kilojoule kilogram (kJ/kg)
100 bushels (bu)	= 2.7 tonne (t) wheat
	= 2.2 tonne (t) barley
	= 2.3 tonne (t) rapeseed
	= 2.5 tonne (t) corn
dry grain weight (ton)	wet grain weight (ton) x $\frac{(100 - \text{wet moisture content} (\%))}{(100 - \text{dry moisture content} (\%))}$



3000 College Drive South
Lethbridge, Alberta, Canada T1K 1L6
Telephone: (403) 329-1212
FAX: (403) 329-5562
<http://www.agric.gov.ab.ca/navigation/engineering/afmrc/index.html>

Prairie Agricultural Machinery Institute

Head Office: P.O. Box 1900, Humboldt, Saskatchewan, Canada S0K 2A0
Telephone: (306) 682-2555

Test Stations:
P.O. Box 1060
Portage la Prairie, Manitoba, Canada R1N 3C5
Telephone: (204) 239-5445
Fax: (204) 239-7124

P.O. Box 1150
Humboldt, Saskatchewan, Canada S0K 2A0
Telephone: (306) 682-5033
Fax: (306) 682-5080