

# Evaluation Report

# 242



**GSW 561006 CANC SHALLOW WELL JET PUMP**

## GSW 561006 CANC SHALLOW WELL JET PUMP

### MANUFACTURER:

GSW Limited  
599 Hill Street West  
Fergus, Ontario  
N1M 2X1

### DISTRIBUTORS:

Contact the Manufacturer for names of Distributors

**RETAIL PRICE:** \$304.00 (March, 1980, f.o.b. Fergus, Ontario).

### SUMMARY AND CONCLUSIONS

Measured water flow of the GSW CANC jet pump varied from 35 L/min (7.7 gal/min) to 11 L/min (2.4 gal/min) over a range of total heads from 8 to 40 m (26 to 131 ft) with a 4.5 m (15 ft) suction lift. At peak efficiency, flow was 4% lower than the manufacturer's published data.

Peak overall efficiency of 14% occurred at a discharge head of 25 m (82 ft) with a flow of 34.5 L/min (7.6 gal/min). The corresponding pump power output was 0.16 kW.

The owner's manual supplied with the pump was clearly written, and contained comprehensive installation, electrical, priming, maintenance and troubleshooting instructions. A pressure switch was supplied with the pump.

### RECOMMENDATIONS

No need for recommendations was apparent.

*Chief Engineer -- E. O. Nyborg*

*Senior Engineer -- J. C. Thauberger*

*Project Engineer: Gregory R. Pool*

### THE MANUFACTURER STATES:

We agree that the loss of prime experienced in your test was not related to the pump. A faulty foot valve would be the most likely cause.

Note: This report has been prepared using SI units of measurement. A conversion table is given in APPENDIX II.

### GENERAL DESCRIPTION

The GSW CANC is a single stage, shallow well jet pump, with a 25 mm (nominal 1 inch NPT) inlet and a 19 mm (nominal 0.75 inch NPT) outlet, designed for use in wells up to 7.5 m (25 ft) deep. It is powered by a 115/230V, 0.37 kW General Electric electric motor.

Detailed specifications are given in APPENDIX I.

### SCOPE OF TEST

The performance characteristics of the GSW CANC were determined with water, over a full range of discharge heads and suction lifts, using a standard pump testing procedure<sup>1</sup>. In addition, ease of installation, the suitability of the owner's manual and the safety of the pump were evaluated.

## RESULTS AND DISCUSSION

### PERFORMANCE CHARACTERISTICS

Pump performance characteristics, over a range of total heads<sup>2</sup> from 5 to 45 m (16 to 148 ft) of water, are given in FIGURE 1, for a 4.5 m (15 ft) suction lift. Maximum flow at 5 m (16 ft) total head was 35 L/min (7.7 gal/min), while flow ceased at a total head of 45 m (148 ft). The manufacturer's published performance data indicated higher flows than those obtained, over the full range of total heads. At the point of peak overall efficiency, the measured flow data were 4% lower than that indicated by the manufacturer. The peak efficiency, occurring at a discharge head of 25 m (82 ft) was 14%. The corresponding flow was 34.5 L/min (7.6 gal/min).

Maximum pump power output was 0.16 kW, occurring at the peak efficiency point, with a corresponding current draw of 5.1A at a 230V line voltage.

### EASE OF INSTALLATION

One street elbow was required to connect the suction pipe to the pump inlet. A plastic foot valve was supplied with the pump, and was installed on the lower end of the suction pipe throughout the test. Access to the inlet and outlet, for plumbing connections, was convenient.

A priming plug was conveniently located on top of the pump body. Priming of the pump required filling the pump body with water three or four times. The pump consistently lost its prime after standing overnight without being used. This was probably due to a defective foot valve.

### OPERATOR'S MANUAL AND SAFETY ASSESSMENT

The owner's manual was clearly written and contained comprehensive installation, electrical, priming, maintenance and troubleshooting instructions. Wiring and plumbing recommendations were provided. If the instructions were followed closely, a safe electrical connection could be made. The pump motor had CSA approval.

---

<sup>1</sup>PAMI T7821, Detailed Test Procedure for Domestic Water Pumps.  
<sup>2</sup>Total head is the sum of the discharge head and the suction lift.

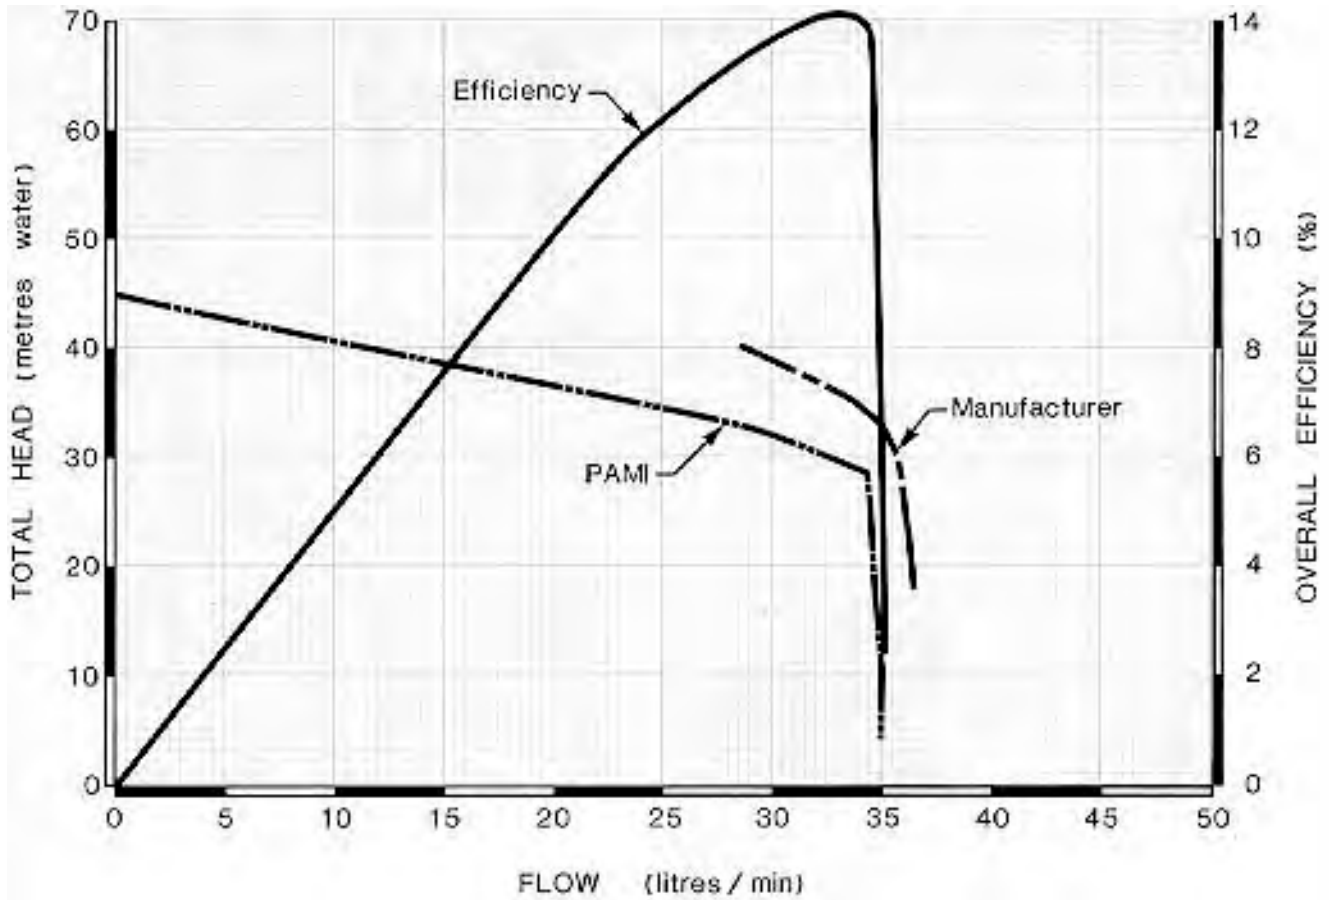


FIGURE 1. Performance Characteristics.

**APPENDIX I**

**SPECIFICATIONS**

**PUMP:**

- make GSW
- model CANC (561006)
- serial no. 05-79

**MOTOR:**

- make Canadian General Electric
- model 3J694Ax11
- power rating 0.37 kW
- voltage rating 115/230 V
- current rating 8.2/4.1 A
- service factor 1.6
- speed 3450 rpm

**OVERALL DIMENSIONS:**

- length 460 mm
- width 230 mm
- height 310 mm

**TOTAL WEIGHT:**

16.4 kg

**INLET:**

- location top of ejector body
- nominal size 25 mm (1 inch NPT)

**OUTLET:**

- location top left side
- nominal size 19 mm (0.75 inch NPT)

**FOOT VALVE:**

- type plashc
- nominal size 25 mm (t inch NPT)

**PRESSURE REGULATOR SWITCH:**

- make Pumptrol -- Square 'D'
- switching pressure range 140 - 280 kPa

**APPENDIX II**

**CONVERSION TABLE**

- 1 litre (L) = 0.22 Imperial gallon (gal)
- 1 kilowatt (kW) = 1.3 horsepower (hp)
- 1 metre water (m) = 1.4 pounds force/square inch (psi)
- 1 metre water (m) = 3.3 feet water (ft)
- 1 kilopascal (kPa) = 0.15 pounds force/square inch (psi)

The Prairie Agricultural Machinery Institute is a co-operative undertaking of the Canadian provinces of Alberta, Manitoba and Saskatchewan. To meet its objectives of evaluating existing agricultural machinery and developing new and improved machinery, the Institute operates three facilities located at Humboldt, Saskatchewan; Lethbridge, Alberta; and Portage la Prairie, Manitoba. Programs of evaluation, research and development are conducted relevant to machinery used by prairie farmers.

This report is published under the authority of the Ministers of Agriculture of Alberta, Manitoba and Saskatchewan and may not be reproduced in whole or in part without the prior approval of the Prairie Agricultural Machinery Institute.

For further information on other reports which are available and on the work of the Machinery Institute contact the PRAIRIE AGRICULTURAL MACHINERY INSTITUTE:

**Head Office:** P.O. Box 1900  
Humboldt, Saskatchewan, Canada, SOK 2A0  
Telephone: (306) 682.2555  
Telex: 074-2468

**Test Stations:** 3000 College Drive South  
Lethbridge, Alberta, Canada, T1K 1L6  
Telephone (403) 329-1212

P.O. Box 1060  
Portage la Prairie, Manitoba, Canada, RIN 3C5  
Telephone: (204) 857.9701

P.O. Box 1150  
Humboldt, Saskatchewan, Canada, SOK 2A0  
Telephone: (306) 682.5033



**ALBERTA  
FARM  
MACHINERY  
RESEARCH  
CENTRE**

3000 College Drive South  
Lethbridge, Alberta, Canada T1K 1L6  
Telephone: (403) 329-1212  
FAX: (403) 329-5562  
<http://www.agric.gov.ab.ca/navigation/engineering/afmrc/index.html>

### **Prairie Agricultural Machinery Institute**

Head Office: P.O. Box 1900, Humboldt, Saskatchewan, Canada SOK 2A0  
Telephone: (306) 682-2555

Test Stations:  
P.O. Box 1060  
Portage la Prairie, Manitoba, Canada R1N 3C5  
Telephone: (204) 239-5445  
Fax: (204) 239-7124

P.O. Box 1150  
Humboldt, Saskatchewan, Canada SOK 2A0  
Telephone: (306) 682-5033  
Fax: (306) 682-5080