

pami

Evaluation Report No. E1777M
Printed: March 1979
Tested at: Portage la Prairie
December, 1978
ISSN 0383-3445

**Evaluation
Report**



Report On
JACUZZI 7S4C-11-S2 SUBMERSIBLE DEEP WELL PUMP - 86

prairie agricultural machinery institute

Humboldt, Saskatchewan · Lethbridge, Alberta · Portage la Prairie, Manitoba

DIRECTOR

J.A. Peck

JACUZZI 7S4C-11-S2 SUBMERSIBLE DEEP WELL PUMP

MANUFACTURER:

Jacuzzi Canada Ltd.
330 Humberline Drive
Rexdale, Ontario
M9W 1R5

RETAIL PRICE:

\$.510.00 (f.o.b. Winnipeg March, 1979)

SUMMARY AND CONCLUSIONS

Measured capacity of the Jacuzzi 7S4C-11-S2 submersible pump varied from 98 L/min to 22 L/min over a range of discharge heads from 12 to 60 m. Capacity was 11.5% lower than manufacturer's published data at peak efficiency.

Peak pump-motor efficiency of 28% occurred at a discharge head of 43.5 m with a flow of 66 L/min. The corresponding power output was 0.465 kW.

The operator's manual was clearly written, containing comprehensive installation, servicing and operating instructions. An electrical wiring kit was provided with the pump.

RECOMMENDATIONS:

No need for recommendations was apparent.

Chief Engineer -- E. O. Nyborg

Senior Engineer -- J.C. Thauberger

Project Engineer -- G.R. Pool

THE MANUFACTURER STATES

The pump-motor efficiency referred to in this report includes the combination of electrical and hydraulic losses of the pump-motor system.

The pump-motor efficiency must not be confused with the pump efficiency, a higher value that is used by manufacturers to evaluate the pump only, regardless of how it is driven.

The power demand of this pump is less than the maximum output of the motor, thereby increasing the motor life expectancy.

GENERAL DESCRIPTION

The Jacuzzi 7S4C11S2 is a 100 mm diameter, 11 stage, deep well, submersible water pump with a 38 mm (nominal 1-1/2 inch NPT) discharge outlet, designed for use in wells up to 43 m deep. It is powered by a 230 V, 0.56 kW Franklin electric motor.

Detailed specifications are given in APPENDIX I.

SCOPE OF TEST

The performance characteristics of the Jacuzzi 7S4C11 S2 were determined with water, over a full range of discharge heads, using a standard pump testing procedure.¹ In addition, the suitability of the operator's manual and the safety of the pump were assessed.

RESULTS AND DISCUSSION

PERFORMANCE CHARACTERISTICS

Pump performance characteristics, over a range of discharge heads from 12 to 64 m of water are given in FIGURE 1. Maximum flow rate at 12 m discharge head was 98 L/min, while flow ceased at a discharge head of 64 m. The manufacturer's published performance data indicated higher pumping rates than those obtained, over the full range of discharge heads. At the point of peak pump-motor efficiency, the PAMI test data were 11.5% lower than the manufacturer's published capacity data. The peak efficiency,

DISTRIBUTORS:

Jacuzzi Canada Ltd.
85 Keith Road
Winnipeg, Manitoba
R3H 0H7

Jacuzzi Canada Ltd.
3824 - 7th Street S.E.
Calgary, Alberta
T2G 2Y8

occurring at a head of 43.5 m, was 28%. The corresponding flow rate was 66 L/min.

Maximum power output was 0.465 kW, occurring at the peak efficiency point, with a corresponding current draw of 7.3 A.

OPERATOR'S MANUAL AND SAFETY ASSESSMENT

The operator's manual was clearly written and contained comprehensive installation, servicing and operating instructions. Detailed drawings and explanations were provided for various equipment installations.

A power cable selection chart and suggested fuse sizes were provided. A method for splicing the cable to the motor drop cable was clearly explained. If the instructions were followed closely, this method provided a safe electrical connection.

The operator's manual recommended that a suitable pressure relief valve be installed if the pump could generate more than 60 m pressure at the well head.

1. PAMI 77821, *Detailed Test Procedures for Domestic Water Pumps*

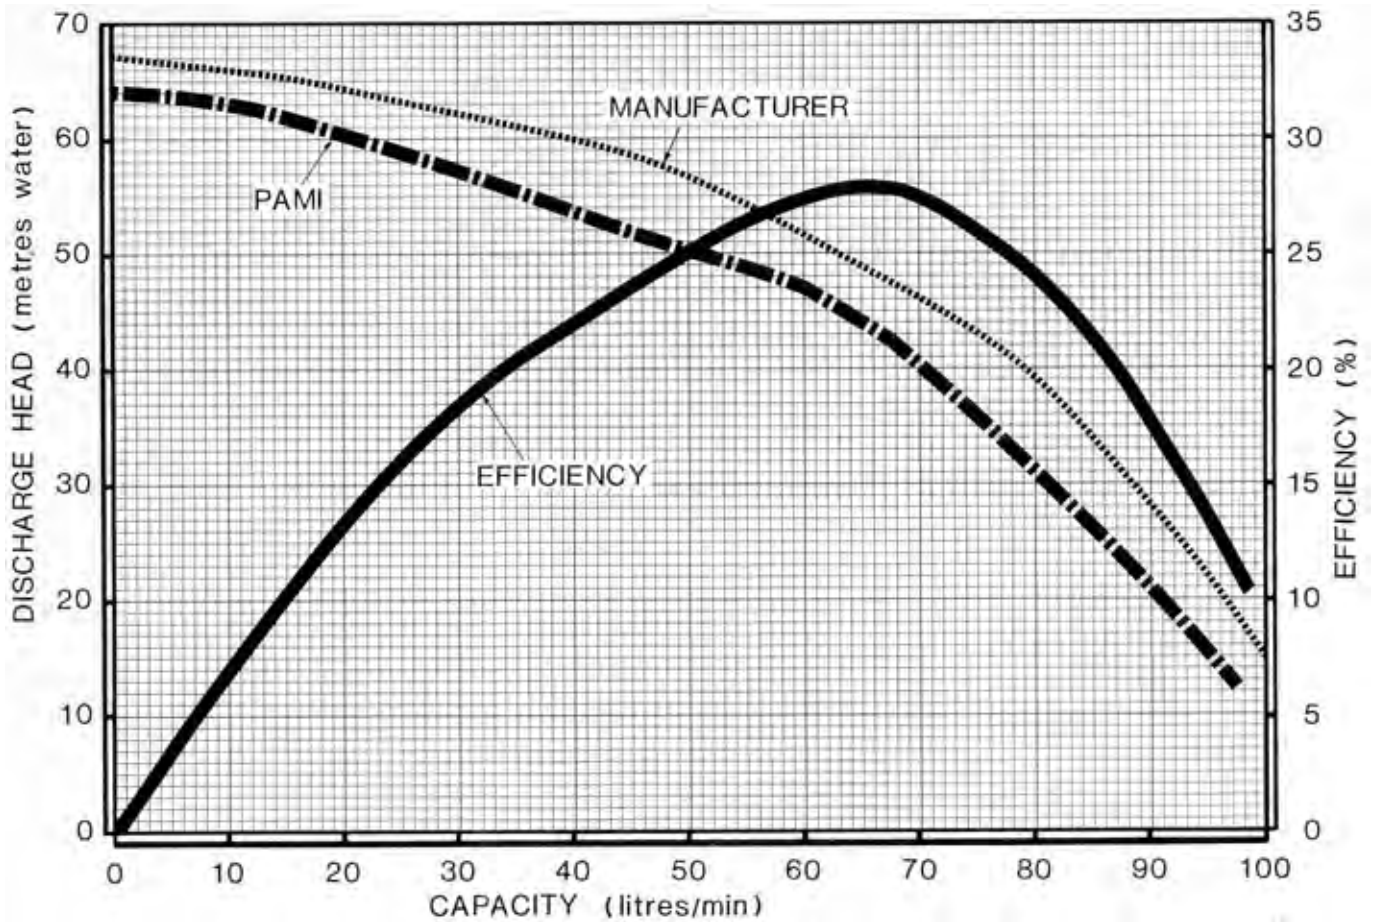


FIGURE 1. Performance Characteristics.

APPENDIX I

SPECIFICATIONS

<i>Pump:</i>	
-- make	Jacuzzi
-- model	7S4C-11-S2
-- number of impellers	11
-- speed	3450 rpm
<i>Motor:</i>	
-- make	Franklin Electric
-- model	2143074116
-- size	0.56 kW
-- voltage	230 V
-- ampere rating	8.0 A
-- service factor	1.5
-- speed	3450 rpm
<i>Overall Dimensions:</i>	
-- motor length	280 mm
-- pump length	495 mm
-- total length	775 mm
-- clearance diameter	100 mm
<i>Total Weight:</i>	
	15.2 kg
<i>Inlet:</i>	
-- location	305 mm above pump foot

-- screen type	plastic
-- screen mesh	3.0 mm
-- inlet area	8870 mm ²
<i>Outlet:</i>	
-- nominal size	38 mm (1-1/2 in NPT)
<i>Rope Eyes:</i>	
-- number	1
-- diameter	9 mm

APPENDIX II

METRIC UNITS

In keeping with the Canadian metric conversion program, this report has been prepared in SI units. For comparative purposes, the following conversions may be used.

1 litre/min (L/min)	= 0.22 Imperial gallon/min (gal/min)
1 kilowatt (kW)	= 1.34 horsepower (hp)
1 metre water (m)	= 1.42 pounds/square inch (psi)
1 metre water (m)	= 3.28 feet water (ft)



**ALBERTA
FARM
MACHINERY
RESEARCH
CENTRE**

3000 College Drive South
Lethbridge, Alberta, Canada T1K 1L6
Telephone: (403) 329-1212
FAX: (403) 329-5562
[http://www.agric.gov.ab.ca/navigation/engineering/
afmrc/index.html](http://www.agric.gov.ab.ca/navigation/engineering/afmrc/index.html)

Prairie Agricultural Machinery Institute

Head Office: P.O. Box 1900, Humboldt, Saskatchewan, Canada S0K 2A0
Telephone: (306) 682-2555

Test Stations:
P.O. Box 1060
Portage la Prairie, Manitoba, Canada R1N 3C5
Telephone: (204) 239-5445
Fax: (204) 239-7124

P.O. Box 1150
Humboldt, Saskatchewan, Canada S0K 2A0
Telephone: (306) 682-5033
Fax: (306) 682-5080